ABLOY WALL PDs GUIDE

Key Revalidation "Charging Key"

A key must be inserted in a Wall PD ("Charged") to stay active. Once revalidated, the key stays active for 20hrs it will then allow access to assigned locks. During the process it also runs firmware updates to the keys. If a key is not revalidated within the specified interval, it becomes inactive until it is revalidated again.


Please be patient if your key is taking a little longer than normal to revalidate/update.

Revalidating schedule still needs to happen even if charging days are missed (e.g. *If off for 1 week the key will need 7days worth of updates*)

Terms and Conditions

By inserting your key into this device, you agree that your keys activity can be audited at any time. The key has been allocated to **YOU** by Pharmacy Informatics and it is **NOT** to be shared with others

LED Indications		Buzzer	Interpretation
Solid white			Power On and Online
CLIQ			Wall PD: Acquiring IP Address
Fast white blinking			Mobile PD: Initialising Bluetooth or USB Connection
			Connecting to Remote Server during Startup Sequence
Slow white blinking	Solid green	1 long beep	Offline Update Finished OK
Solid red			Mobile PD Battery Low
One red blink	One blink		Mobile PD Battery Critical Low
Solid			Key Battery Low
Blinking			Connecting during Remote Update
Solid			Connected during Remote Update
Solid green			Firmware Upgrade Finished
		1 beep	Operation Finished OK
			Remote PD Settings Updated
Blinking			Downloading and Processing
Solid		1 beep	E-mail Sent
X		3 beeps	Operation finished with error

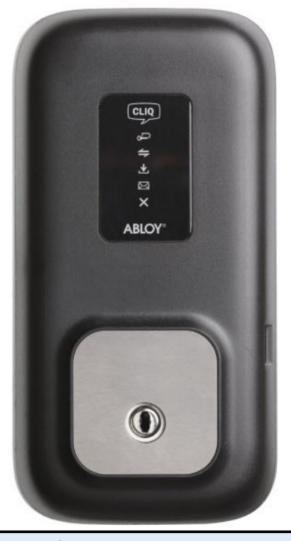

Pharmacy Informatics Contact Details

Ext: 3272 **Email:** swbh.pharmacyinformatics@nhs.net

^{*}If you get a red X please return to pharmacy for repair.

^{*}If you get a Low Battery Warning 🔄 please return to pharmacy for a replacement battery.